

PD-41813S

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



## Cascade

PD-41813S

**PRODUCT DESCRIPTION**

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

**FEATURES**

- Driver concealed within the canopy
- CNC precision-cut etched diffuser
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with acrylic diffuser


**REPLACEMENT PARTS**

RPL-GLA-41819 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41813S 20" - 13 Lights	3500K 90	98W	4878	AB Aged Brass
	3500K 90	98W	4878	BK Black
	3500K 90	98W	4878	PN Polished Nickel

Example: **PD-41813S-PN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

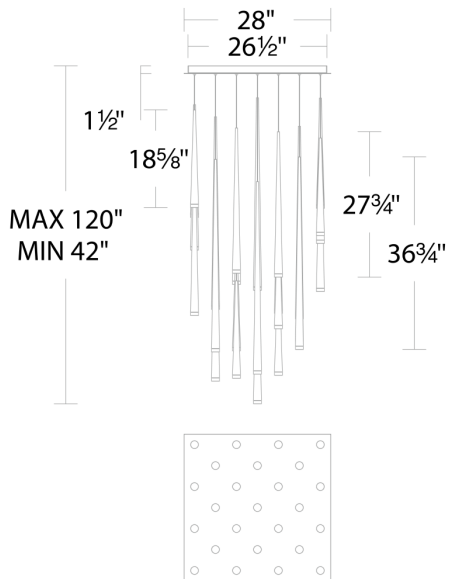

PD-41825S

Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Cascade

PD-41825S

**PRODUCT DESCRIPTION**

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

**FEATURES**

- Driver concealed within the canopy
- CNC precision-cut etched diffuser
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. and 175 lbs. or supported independently of the outlet box

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with acrylic diffuser


**REPLACEMENT PARTS**

RPL-GLA-41819 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41825S 28" - 25 Lights	3500K 90	182W	9381	AB Aged Brass
	3500K 90	182W	9381	BK Black
	3500K 90	182W	9381	PN Polished Nickel

Example: **PD-41825S-PN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

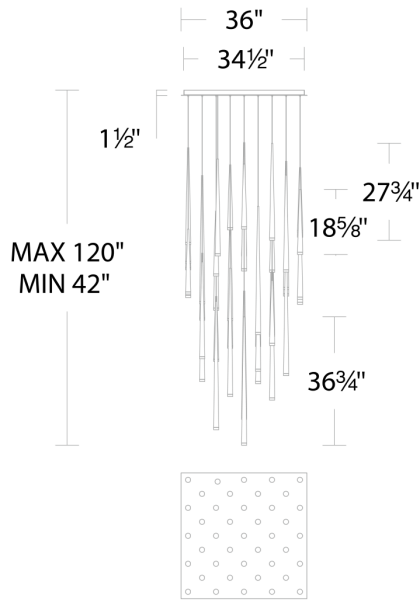

PD-41841S

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Cascade

PD-41841S

**PRODUCT DESCRIPTION**

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

**FEATURES**

- Driver concealed within the canopy
- CNC precision-cut etched diffuser
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. and 175 lbs. or supported independently of the outlet box

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with acrylic diffuser

**REPLACEMENT PARTS**

RPL-GLA-41819 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41841S 36" - 41 Lights	3500K 90	294W	15385	AB Aged Brass
	3500K 90	294W	15385	BK Black
	3500K 90	294W	15385	PN Polished Nickel

Example: **PD-41841S-PN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)